# International

# Ultrafast Soft Recovery Diode

#### Features

- Ultrafast Recovery
- 175°C Operating Junction Temperature
- Screw Mounting Only
- Lead-Free Plating

# Benefits

- Reduced RFI and EMI
- Higher Frequency Operation
- Reduced Snubbing
- Reduced Parts Count


#### **Description/Applications**

These diodes are optimized to reduce losses and EMI/ RFI in high frequency power conditioning systems. The softness of the recovery eliminates the need for a snubber in most applications. These devices are ideally suited for HF welding, power converters and other applications where switching losses are not significant portion of the total losses.

#### **Absolute Maximum Ratings**

	Parameters	Max	Units
V <sub>R</sub>	Cathode to Anode Voltage	400	V
I <sub>F(AV)</sub>	Continuous Forward Current, $T_C = 101^{\circ}C$	80	А
I <sub>FSM</sub>	Single Pulse Forward Current, $T_C = 25^{\circ}C$	800	
I <sub>FRM</sub> ①	Maximum Repetitive Forward Current	160	
T <sub>J</sub> , T <sub>STG</sub>	Operating Junction and Storage Temperatures	- 55 to 175	C°

① Square Wave, 20kHz

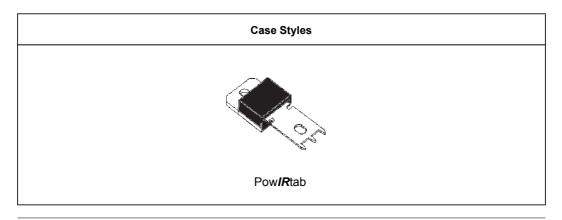

Document Number: 93025

www.vishay.com

 $t_{rr}$  = 50ns (typ)  $I_{F(AV)}$  = 80Amp  $V_R$  = 400V

80EBU04

# Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)

	Parameters	Min	Тур	Max	Units	Test Conditions
$V_{BR}, V_{r}$	Breakdown Voltage, Blocking Voltage	400	-	-	V	I <sub>R</sub> = 100μA
VF	Forward Voltage	-	1.1	1.3	V	I <sub>F</sub> = 80A
		-	0.92	1.08	V	I <sub>F</sub> = 80A, T <sub>J</sub> = 175°C
		-	0.98	1.15	V	I <sub>F</sub> = 80A, T <sub>J</sub> = 125°C
I <sub>R</sub>	Reverse Leakage Current	-	-	50	μA	$V_R = V_R$ Rated
		-	-	2	mA	$T_J$ = 150°C, $V_R$ = $V_R$ Rated
CT	Junction Capacitance	-	50	-	pF	V <sub>R</sub> = 200V
L <sub>S</sub>	Series Inductance	-	3.5	-	nH	Measured lead to lead 5mm from package body

# Dynamic Recovery Characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)

	Parameters	Min	Тур	Max	Units	Test Condition	IS
t <sub>rr</sub>	Reverse Recovery Time	-	50	60	ns	I <sub>F</sub> = 1A, di <sub>F</sub> /dt = 20	0A/µs, V <sub>R</sub> = 30V
		-	87	-		$T_J = 25^{\circ}C$	I <sub>F</sub> = 80A
		-	151	-		T <sub>J</sub> = 125°C	V <sub>R</sub> = 200V di <sub>F</sub> /dt = 200A/µs
I <sub>RRM</sub>	Peak Recovery Current	-	9.3	-	A	T <sub>J</sub> = 25°C	uip /ut = 2007/µ5
		-	17.2	-		T <sub>J</sub> = 125°C	
Q <sub>rr</sub>	Reverse Recovery Charge	-	405	-	nC	T <sub>J</sub> = 25°C	
			-	1300	-	T <sub>J</sub> = 125°C	


# **Thermal - Mechanical Characteristics**

	Parameters	Min	Тур	Мах	Units
R <sub>thJC</sub>	Thermal Resistance, Junction to Case			0.70	K/W
R <sub>thCS</sub> ②	Thermal Resistance, Case to Heatsink		0.2		
Wt	Weight			5.02	g
			0.18		(oz)
Т	Mounting Torque	1.2		2.4	N * m
		10		20	lbf.in

② Mounting Surface, Flat, Smooth and Greased

# International **TOR** Rectifier

## 80EBU04

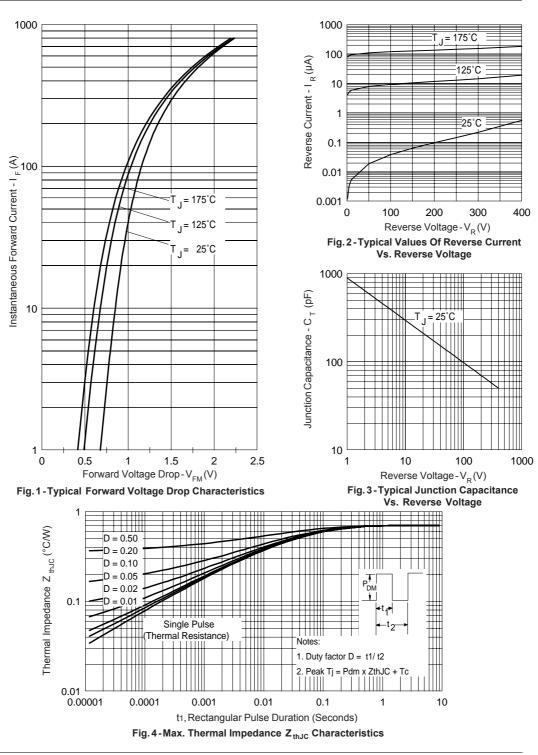


Bulletin PD-20742 rev. C 02/06

www.vishay.com 3


Document Number: 93025

Bulletin PD-20742 rev. C 02/06











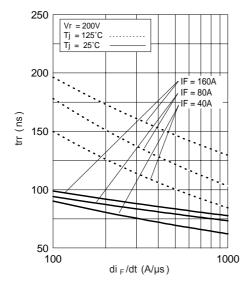


Fig. 7 - Typical Reverse Recovery time vs. di <sub>F</sub>/dt

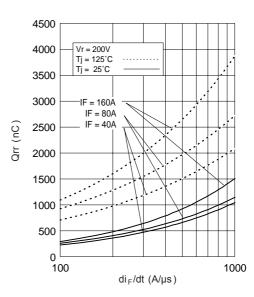


Fig. 8 - Typical Stored Charge vs. di <sub>F</sub>/dt

(3) Formula used:  $T_c = T_J - (Pd + Pd_{REV}) \times R_{thJC}$ ;  $Pd = Forward PowerLoss = I_{F(AV)} \times V_{FM} @ (I_{F(AV)}/D)$  (see Fig.6);  $Pd_{REV} = Inverse PowerLoss = V_{R1} \times I_R (1-D); I_R @ V_{R1} = 80\%$  rated  $V_R$ 

Document Number: 93025

www.vishay.com 4

Bulletin PD-20742 rev. C 02/06

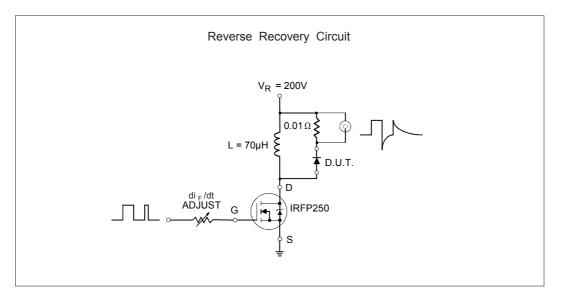


Fig. 9- Reverse Recovery Parameter Test Circuit


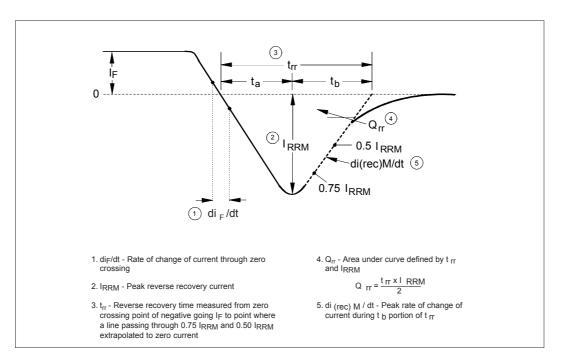


Fig. 10 - Reverse Recovery Waveform and Definitions

## Bulletin PD-20742 rev. C 02/06

# International

**Outline Table** 

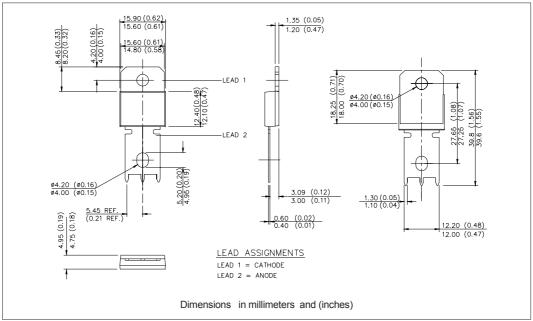

# Ordering Information Table

Device	Code	80 E	B	U	04
		Current Ra	ting	$\bigcirc$	80A)
2	3 -	Pow <i>IR</i> tab Ultrafast Re		(Ultra	afast/ H
	5 -	Voltage Rat	ing	(04 =	400V)

Data and specifications subject to change without notice. This product has been designed and qualified for Industrial Level and Lead-Free. Qualification Standards can be found on IR's Web site.

# International

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105 TAC Fax: (310) 252-7309 02/06

> www.vishay.com 6

Document Number: 93025



Vishay

# Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.