

Surface Mount Directional Coupler

TCD-10-1W+

50Ω 10 to 750 MHz

Features

- wideband, 10 to 750 MHz
- low mainline loss, 1.2 dB typ.
- aqueous washable
- leads for excellent solderability
- protected by US Patent 6,140,887

Applications

- VHF/UHF
- signal sampling
- communications



Generic photo used for illustration purposes only

CASE STYLE: DB714

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

| Available Tape and Reel at no extra cost | |
|--|-----------------------|
| Reel Size | Devices/Reel |
| 7" | 20, 50, 100, 200, 500 |
| 13" | 1000, 2000 |

Electrical Specifications

| Parameter | Frequency (MHz) | Min. | Typ. | Max. | Unit |
|----------------------------|-----------------|------|----------|------|------|
| Frequency Range | | 10 | | 750 | MHz |
| Mainline Loss ¹ | 10 - 100 | — | 1.3 | 2.1 | dB |
| | 100 - 350 | — | 1.2 | 1.6 | |
| | 350 - 750 | — | 1.4 | 2.0 | |
| Nominal Coupling | | — | 10.3±0.5 | — | dB |
| Coupling Flatness(±) | | — | ±0.8 | — | dB |
| Directivity | 10 - 100 | 17 | 22 | — | dB |
| | 100 - 350 | 14 | 18 | — | |
| | 350 - 750 | — | 15 | — | |
| VSWR | 10 - 750 | | 1.3 | | :1 |
| Input Power | 10 - 100 | — | — | 0.5 | W |
| | 100 - 750 | — | — | 1.0 | |

1. Mainline loss includes theoretical power loss at coupled port.

Maximum Ratings

| Parameter | Ratings |
|-----------------------|----------------|
| Operating Temperature | -40°C to 85°C* |
| Storage Temperature | -55°C to 100°C |


Permanent damage may occur if any of these limits are exceeded.

* Case temperature is defined as temperature on ground leads.

Pin Connections

| Function | Pin Number |
|-------------------|------------|
| INPUT | 3 |
| OUTPUT | 4 |
| COUPLED | 1 |
| GROUND | 2 |
| 50Ω TERM EXTERNAL | 6 |
| NOT USED | 5 |


Electrical Schematic

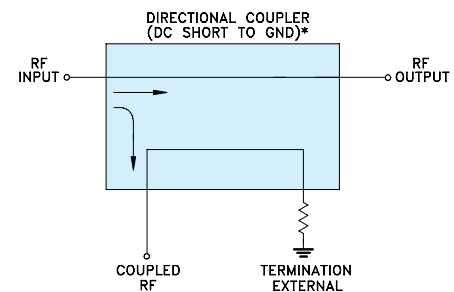


* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.




Outline Drawing

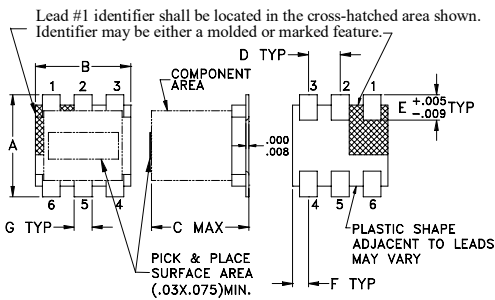

PCB Land Pattern



Demo Board MCL P/N: TB-71 Suggested PCB Layout (PL-009)

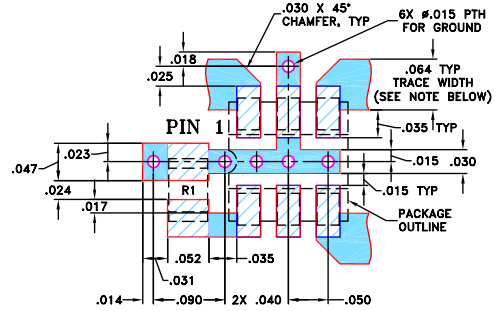

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030 ± 0.002 ; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.




- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch/mm)

| A | B | C | D | E | F |
|------|------|------|------|-------|------|
| .160 | .150 | .160 | .050 | .040 | .025 |
| 4.06 | 3.81 | 4.06 | 1.27 | 1.02 | 0.64 |
| G | H | J | K | wt | |
| .028 | .065 | .190 | .030 | grams | |
| 0.71 | 1.65 | 4.83 | 0.76 | 0.15 | |

Typical Performance Data

| Frequency (MHz) | Mainline Loss (dB) In-Out | Coupling (dB) In-Cpl | Directivity (dB) | Return Loss (dB) | | |
|-----------------|---------------------------|----------------------|------------------|------------------|-------|-------|
| | | | | In | Out | Cpl |
| 9.00 | 1.18 | 10.17 | 22.87 | 17.95 | 27.94 | 17.96 |
| 15.00 | 1.18 | 10.14 | 22.85 | 18.48 | 30.46 | 18.53 |
| 24.00 | 1.18 | 10.13 | 22.75 | 18.67 | 31.68 | 18.74 |
| 30.00 | 1.18 | 10.14 | 22.68 | 18.71 | 31.90 | 18.79 |
| 50.00 | 1.20 | 10.16 | 22.53 | 18.77 | 31.89 | 18.87 |
| 70.00 | 1.21 | 10.16 | 22.38 | 18.78 | 31.59 | 18.90 |
| 100.00 | 1.21 | 10.17 | 22.13 | 18.78 | 30.97 | 18.93 |
| 300.00 | 1.25 | 10.31 | 19.54 | 18.13 | 26.04 | 18.34 |
| 500.00 | 1.32 | 10.49 | 16.70 | 17.08 | 22.79 | 17.34 |
| 800.00 | 1.47 | 10.73 | 13.13 | 15.61 | 19.73 | 15.58 |

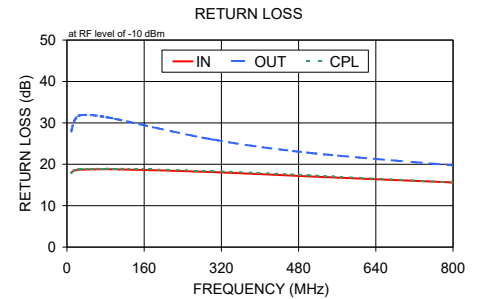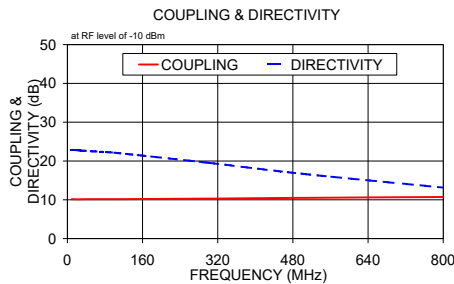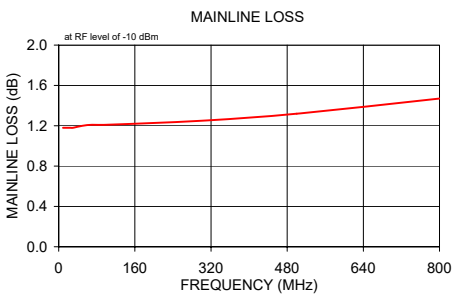

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp