



# R7F7010243AFP

The in-vehicle high-end microcomputer which was the best for body application and had the lineup which can respond to a variety of Systems


## OVERVIEW

The RH850/F1L is a product line in Renesas' RH850/F1x series of single chip microcontrollers designed for automotive body applications. The embedded flash memory will range from 256 KB to 2 MB and packages will be covered from small package 48 pin to 176 pin.

Product Status: Product Inquiry

Family: RH850 Series: RH850/F1x Group: RH850/F1L

## BLOCK DIAGRAM

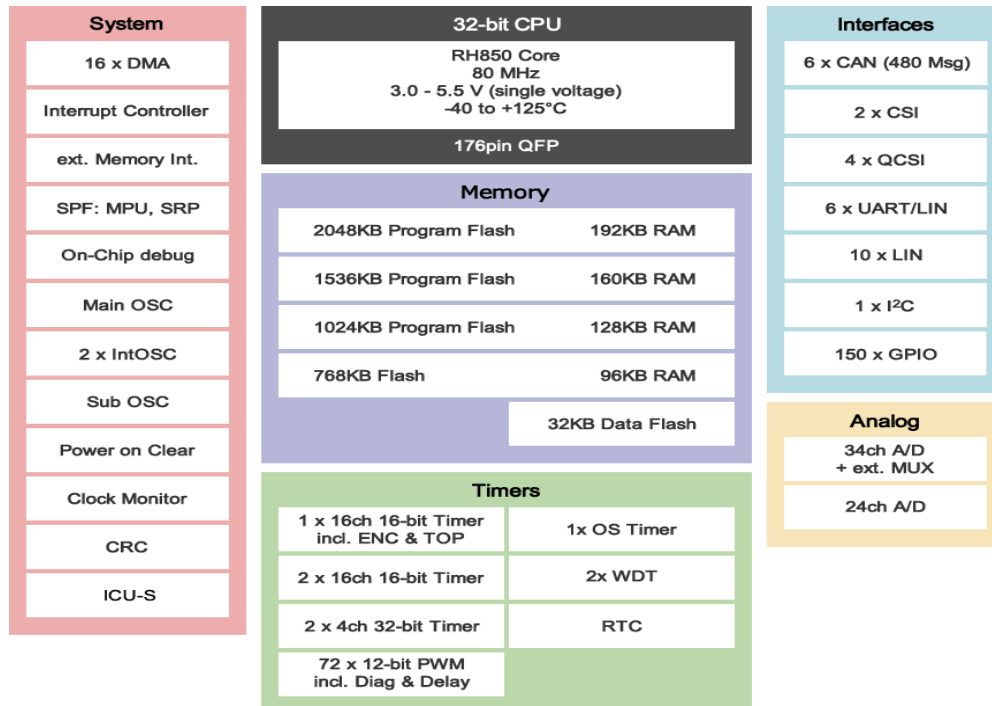

## PARAMETRICS

Parameters	R7F7010243AFP
<b>Memory</b>	
Program memory	768 KB Flash memory
RAM	96 KB
Data Flash	32 KB
<b>CPU (Bit, Clock, DMA, External Bus etc)</b>	
CPU	RH850G3K (32-bit)
Max. Frequency	80 MHz
On-chip Oscillator Freq.	8 MHz, Low Speed: 240 kHz
PLL	YES
Power-On Reset	YES
Low Voltage Detection	YES
DMA Remarks	DMAC x 16ch
External Interrupt Pins	13
I/O Ports	81
<b>Timers</b>	
16-bit Timers	32 ch
32-bit Timers	8 ch
Watchdog Timers	2 ch
Other Timers	Timer for OS x 1ch
PWM Output	48
<b>Analog</b>	
A/D Converters	10-bit x 20 ch, 12-bit x 16 ch
<b>Interfaces</b>	
CAN	3 ch
CSIs	1 ch
SPIs	4 ch
UARTs	4 ch
I2Cs	1 ch
LIN	7 ch
Serial Interface Remarks	UART: RLIN3, LIN: RLIN3 + RLIN2
<b>Operating Conditions</b>	
Operating Voltage	to 5.5 V
Operating Temperature	-40 to 105 °C (Ambient Temperature)
<b>Remarks</b>	
Remarks	100-pin 32-bit microcontroller with low power RH850G3K core suitable for car body control (R850/F1L)