


FEATURES

- Operate From 1.65 V to 3.6 V
- Specified From –40°C to 85°C, –40°C to 125°C, and –55°C to 125°C
- Inputs and Open-Drain Outputs Accept
 Voltages up to 5.5 V

SN54LVC06A, SN74LVC06A HEX INVERTER BUFFERS/DRIVERS WITH OPEN-DRAIN OUTPUTS

SCAS596N-OCTOBER 1997-REVISED JULY 2005

- Max t_{pd} of 3.7 ns at 3.3 V
- I_{off} Supports Partial-Power-Down Mode Operation
- Latch-Up Performance Exceeds 250 mA Per JESD 17

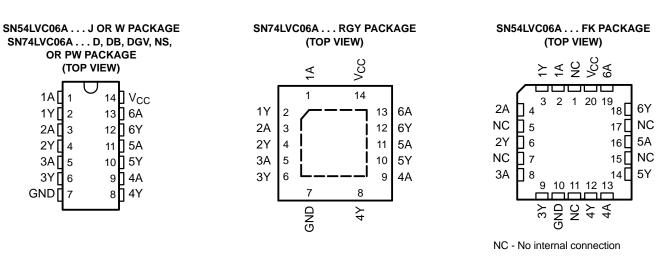

DESCRIPTION/ORDERING INFORMATION

These hex inverter buffers/drivers are designed for 1.65-V to 3.6-V V_{CC} operation.

The outputs of the 'LVC06A devices are open drain and can be connected to other open-drain outputs to implement active-low wired-OR or active-high wired-AND functions. The maximum sink current is 24 mA.

Inputs can be driven from either 3.3-V or 5-V devices. This feature allows the use of these devices as translators in a mixed 3.3-V/5-V system environment.

ORDERING INFORMATION

| T _A | PA | CKAGE ⁽¹⁾ | ORDERABLE PART NUMBER | TOP-SIDE MARKING |
|----------------|-------------|----------------------|-----------------------|------------------|
| –40°C to 85°C | QFN – RGY | Reel of 1000 | SN74LVC06ARGYR | LC06A |
| | | Tube of 50 | SN74LVC06AD | |
| | SOIC – D | Reel of 2500 | SN74LVC06ADR | LVC06A |
| | | Reel of 250 | SN74LVC06ADT | |
| Ş | SOP – NS | Reel of 2000 | SN74LVC06ANSR | LVC06A |
| –40°C to 125°C | SSOP – DB | Reel of 2000 | SN74LVC06ADBR | LC06A |
| | | Tube of 90 | SN74LVC06APW | |
| | TSSOP – PW | Reel of 2000 | SN74LVC06APWR | LC06A |
| | | Reel of 250 | SN74LVC06APWT | |
| | TVSOP – DGV | Reel of 2000 | SN74LVC06ADGVR | LC06A |
| | CDIP – J | Tube of 25 | SNJ54LVC06AJ | SNJ54LVC06AJ |
| -55°C to 125°C | CFP – W | Tube of 150 | SNJ54LVC06AW | SNJ54LVC06AW |
| | LCCC – FK | Tube of 55 | SNJ54LVC06AFK | SNJ54LVC06AFK |

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

SCAS596N-OCTOBER 1997-REVISED JULY 2005



DESCRIPTION/ORDERING INFORMATION (CONTINUED)

These devices are fully specified for partial-power-down applications using I_{off}. The I_{off} circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

FUNCTION TABLE (EACH INVERTER)

| INPUT A | OUTPUT Y |
|------------|-------------|
| Н | L |
| L | Н |

LOGIC DIAGRAM, EACH INVERTER (POSITIVE LOGIC)



Absolute Maximum Ratings⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

| | | | MIN | MAX | UNIT |
|------------------|---|---|------|------|------|
| V _{CC} | Supply voltage range | | -0.5 | 6.5 | V |
| VI | Input voltage range ⁽²⁾ | | -0.5 | 6.5 | V |
| Vo | Output voltage range | | -0.5 | 6.5 | V |
| I _{IK} | Input clamp current | V ₁ < 0 | | -50 | mA |
| I _{OK} | Output clamp current | V _O < 0 | | -50 | mA |
| lo | Continuous output current | | | ±50 | mA |
| | Continuous current through V _{CC} or GND | | | ±100 | mA |
| | | D package ⁽³⁾ | | 86 | |
| | | DB package ⁽³⁾ | | 96 | |
| 0 | Declares the second lines of second | DGV package ⁽³⁾ | | 127 | 0000 |
| θ_{JA} | Package thermal impedance | NS package ⁽³⁾ | | 76 | °C/W |
| | | PW package ⁽³⁾ | | 113 | |
| | | RGY package ⁽⁴⁾ | | 47 | |
| T _{stg} | Storage temperature range | · · · · | -65 | 150 | °C |
| P _{tot} | Power dissipation ⁽⁵⁾⁽⁶⁾ | $T_{A} = -40^{\circ}C \text{ to } 125^{\circ}C$ | | 500 | mW |

(1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

(3) The package thermal impedance is calculated in accordance with JESD 51-7.

(4) The package thermal impedance is calculated in accordance with JESD 51-5.

(5) For the D package: above 70°C the value of P_{tot} derates linearly with 8 mW/K.

(6) For the DB, DGV, NS, and PW packages: above 60°C the value of Ptot derates linearly with 5.5 mW/K.

SCAS596N-OCTOBER 1997-REVISED JULY 2005

Recommended Operating Conditions⁽¹⁾

| | | | SN54LVC0 | 6A ⁽²⁾ | |
|-----------------|--------------------------|-----------------------------|---------------------|----------------------|------|
| | | | –55°C to 1 | 25°C | UNIT |
| | | | MIN | MAX | |
| V | Supply voltage | Operating | 1.65 | 3.6 | V |
| V _{CC} | Supply voltage | Data retention only | 1.5 | | v |
| | | V_{CC} = 1.65 V to 1.95 V | $0.65 	imes V_{CC}$ | | |
| V_{IH} | High-level input voltage | V_{CC} = 2.3 V to 2.7 V | 1.7 | | V |
| | | V_{CC} = 2.7 V to 3.6 V | 2 | | |
| | | V_{CC} = 1.65 V to 1.95 V | (| $0.35 \times V_{CC}$ | |
| VIL | Low-level input voltage | V_{CC} = 2.3 V to 2.7 V | | 0.7 | V |
| | | V_{CC} = 2.7 V to 3.6 V | | 0.8 | |
| VI | Input voltage | | 0 | 5.5 | V |
| Vo | Output voltage | | 0 | 5.5 | V |
| | | V _{CC} = 1.65 V | | 4 | |
| | | V _{CC} = 2.3 V | | 8 | mA |
| I _{OL} | Low-level output current | $V_{CC} = 2.7 V$ | | 12 | ШA |
| | | $V_{CC} = 3 V$ | | 24 | |

(1) All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

(2) Product preview

Recommended Operating Conditions⁽¹⁾

| | | | | | SN74L | /C06A | | | |
|---|----------------------------|--|---------------------|----------------------|----------------------|----------------------|---------------------|---------------------|------|
| | | | T _A = | 25°C | -40°C t | o 85°C | –40°C to | 125°C | UNIT |
| | | | MIN | MAX | MIN | MAX | MIN | MAX | |
| v | Currely unlike the | Operating | 1.65 | 3.6 | 1.65 | 3.6 | 1.65 | 3.6 | V |
| V _{CC} | Supply voltage | Data retention only | 1.5 | | 1.5 | | 1.5 | | V |
| | | $V_{CC} = 1.65 \text{ V}$ to 1.95 V | $0.65 	imes V_{CC}$ | | $0.65 \times V_{CC}$ | | $0.65 	imes V_{CC}$ | | |
| V _{IH} High-level input voltage | V_{CC} = 2.3 V to 2.7 V | 1.7 | | 1.7 | | 1.7 | | V | |
| | input voltage | V _{CC} = 2.7 V to 3.6 V | 2 | | 2 | | 2 | | |
| | | $V_{CC} = 1.65 \text{ V} \text{ to } 1.95 \text{ V}$ | | $0.35 \times V_{CC}$ | | $0.35 \times V_{CC}$ | 0 | $.35 \times V_{CC}$ | |
| V _{IL} | Low-level input voltage | V_{CC} = 2.3 V to 2.7 V | | 0.7 | | 0.7 | | 0.7 | V |
| | input voltage | $V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$ | | 0.8 | | 0.8 | | 0.8 | |
| VI | Input voltage | | 0 | 5.5 | 0 | 5.5 | 0 | 5.5 | V |
| Vo | Output voltage | | 0 | 5.5 | 0 | 5.5 | 0 | 5.5 | V |
| | | V _{CC} = 1.65 V | | 4 | | 4 | | 4 | |
| | Low-level | V _{CC} = 2.3 V | | 8 | | 8 | | 8 | |
| I _{OL} | output current | V _{CC} = 2.7 V | | 12 | | 12 | | 12 | mA |
| | | $V_{CC} = 3 V$ | | 24 | | 24 | | 24 | |

 All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

SCAS596N-OCTOBER 1997-REVISED JULY 2005

Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

| | | | SN54LVC06A ⁽¹⁾ | |
|-----------------|--|-----------------|----------------------------|------|
| PARAMETER | TEST CONDITIONS | V _{cc} | –55°C to 125°C | UNIT |
| | | | MIN TYP ⁽²⁾ MAX | |
| | I _{OL} = 100 μA | 1.65 V to 3.6 V | 0.2 | |
| | I _{OL} = 4 mA | 1.65 V | 0.45 | |
| V _{OL} | I _{OL} = 8 mA | 2.3 V | 0.7 | V |
| | I _{OL} = 12 mA | 2.7 V | 0.4 | |
| | I _{OL} = 24 mA | 3 V | 0.55 | |
| l _l | $V_{I} = 5.5 \text{ V or GND}$ | 3.6 V | ±5 | μΑ |
| I _{CC} | $V_{I} = V_{CC} \text{ or } GND, I_{O} = 0$ | 3.6 V | 10 | μΑ |
| ΔI_{CC} | One input at V_{CC} – 0.6 V, Other inputs at V_{CC} or GND | 2.7 V to 3.6 V | 500 | μΑ |
| C _i | $V_{I} = V_{CC} \text{ or } GND$ | 3.3 V | 5 | pF |

Texas INSTRUMENTS

www.ti.com

(1) Product preview

(2) $T_A = 25^{\circ}C$

Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

| | | | | SN74LVC06A | | |
|------------------|---|-----------------|-----------------------|---------------|----------------|------|
| PARAMETER | TEST CONDITIONS | V _{cc} | T _A = 25°C | –40°C to 85°C | –40°C to 125°C | UNIT |
| | | | MIN TYP MAX | MIN MAX | MIN MAX | |
| | I _{OL} = 100 μA | 1.65 V to 3.6 V | 0.1 | 0.2 | 0.3 | |
| | I _{OL} = 4 mA | 1.65 V | 0.24 | 0.45 | 0.6 | |
| V _{OL} | I _{OL} = 8 mA | 2.3 V | 0.3 | 0.7 | 0.75 | V |
| | I _{OL} = 12 mA | 2.7 V | 0.4 | 0.4 | 0.6 | |
| | I _{OL} = 24 mA | 3 V | 0.55 | 0.55 | 0.8 | |
| lı | $V_I = 5.5 V \text{ or GND}$ | 3.6 V | ±1 | ±5 | ±20 | μA |
| I _{off} | $V_{I} \text{ or } V_{O} = 5.5 \text{ V}$ | 0 | ±1 | ±10 | ±20 | μA |
| I _{CC} | $V_I = V_{CC}$ or GND, $I_O = 0$ | 3.6 V | 1 | 10 | 40 | μA |
| ΔI_{CC} | One input at V_{CC} – 0.6 V, Other inputs at V_{CC} or GND | 2.7 V to 3.6 V | 500 | 500 | 5000 | μΑ |
| Ci | $V_I = V_{CC}$ or GND | 3.3 V | 5 | | | pF |

Switching Characteristics

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)

| | ARAMETER FROM (INPUT) | | | SN54LVC | 06A ⁽¹⁾ | |
|-----------|--------------------------|----------------|------------------------------------|----------------------------------|--------------------|----|
| PARAMETER | _ | TO (OUTPUT) | V _{cc} | –55°C to 1 | UNIT | |
| | (| (001101) | | MIN MAX 1.4 5.6 | MAX | |
| | | | $1.8 \text{ V} \pm 0.15 \text{ V}$ | 1.4 | 5.6 | |
| | <u>^</u> | × | $2.5~\text{V}\pm0.2~\text{V}$ | 1 | 3.1 | ~~ |
| lpd | A | r | 2.7 V | | 3.9 | ns |
| | | | $3.3~\text{V}\pm0.3~\text{V}$ | 1 | 3.7 | |

(1) Product preview



SCAS596N-OCTOBER 1997-REVISED JULY 2005

Switching Characteristics

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)


| PARAMETER | | TO (OUTPUT) | V _{cc} | | | | SN74LVC | 06A | | | |
|-----------------|-----------------|----------------|-------------------------------|-----------------------|-----|-----|---------------|-----|----------------|-----|------|
| | FROM (INPUT) | | | T _A = 25°C | | | –40°C to 85°C | | –40°C to 125°C | | UNIT |
| | (| | | MIN | TYP | MAX | MIN | MAX | MIN | MAX | |
| | A | Y | $1.8~V\pm0.15~V$ | 1.4 | 3 | 5.1 | 1.4 | 5.6 | 1.4 | 7.6 | |
| + | | | $2.5~V\pm0.2~V$ | 1 | 1.9 | 2.8 | 1 | 3.1 | 1 | 4 | |
| t _{pd} | | | 2.7 V | 1 | 2.4 | 3.7 | 1 | 3.9 | 1 | 5 | ns |
| | | | $3.3~\text{V}\pm0.3~\text{V}$ | 1 | 2.2 | 3.5 | 1 | 3.7 | 1 | 5 | l |

Operating Characteristics

 $T_A = 25^{\circ}C$

| | PARAMETER | TEST CONDITIONS | v _{cc} | ТҮР | UNIT |
|-----------------|---|--------------------|-----------------|-----|------|
| | | | 1.8 V | 2.1 | |
| C _{pd} | Power dissipation capacitance per buffer/driver | f = 10 MHz | 2.5 V | 2.3 | pF |
| | | | 3.3 V | 2.5 | |

SCAS596N-OCTOBER 1997-REVISED JULY 2005

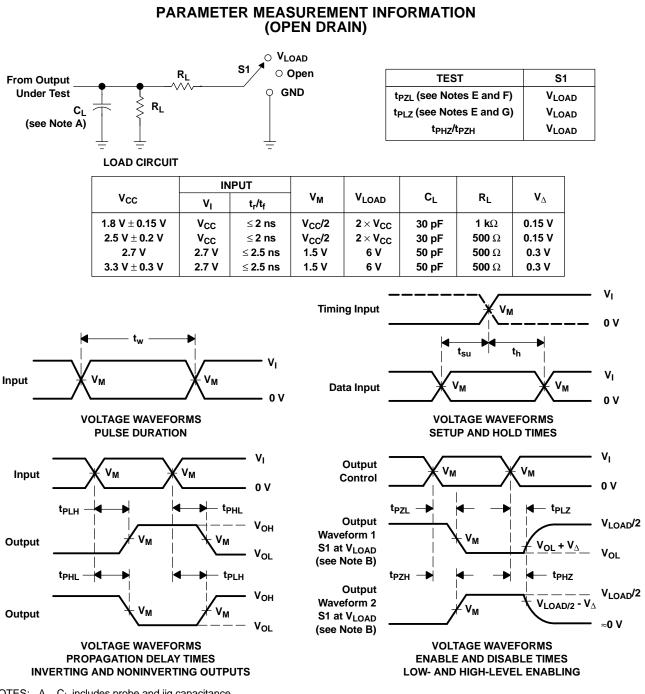

Texas

STRUMENTS www.ti.com

NOTES: A. C₁ includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control. C. All input pulses are supplied by generators having the following characteristics: PRR \leq 10 MHz, Z_O = 50 Ω .
- D. The outputs are measured one at a time, with one transition per measurement.
- E. Since this device has open-drain outputs, t_{PLZ} and t_{PZL} are the same as t_{pd} .
- F. t_{PZL} is measured at V_M.
- G. t_{PLZ} is measured at $V_{OL} + V_{\Delta}$.
- H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms



10-Dec-2020

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead finish/ Ball material (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|---------|
| SN74LVC06AD | ACTIVE | SOIC | D | 14 | 50 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LVC06A | Samples |
| SN74LVC06ADBR | ACTIVE | SSOP | DB | 14 | 2000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LC06A | Samples |
| SN74LVC06ADE4 | ACTIVE | SOIC | D | 14 | 50 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LVC06A | Samples |
| SN74LVC06ADGVR | ACTIVE | TVSOP | DGV | 14 | 2000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LC06A | Samples |
| SN74LVC06ADR | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LVC06A | Samples |
| SN74LVC06ADRE4 | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LVC06A | Samples |
| SN74LVC06ADT | ACTIVE | SOIC | D | 14 | 250 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LVC06A | Samples |
| SN74LVC06ANSR | ACTIVE | SO | NS | 14 | 2000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LVC06A | Samples |
| SN74LVC06APW | ACTIVE | TSSOP | PW | 14 | 90 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LC06A | Samples |
| SN74LVC06APWG4 | ACTIVE | TSSOP | PW | 14 | 90 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LC06A | Samples |
| SN74LVC06APWR | ACTIVE | TSSOP | PW | 14 | 2000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LC06A | Samples |
| SN74LVC06APWRE4 | ACTIVE | TSSOP | PW | 14 | 2000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LC06A | Samples |
| SN74LVC06APWRG4 | ACTIVE | TSSOP | PW | 14 | 2000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LC06A | Samples |
| SN74LVC06APWT | ACTIVE | TSSOP | PW | 14 | 250 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LC06A | Samples |
| SN74LVC06ARGYR | ACTIVE | VQFN | RGY | 14 | 3000 | RoHS & Green | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | LC06A | Samples |
| SN74LVC06ARGYRG4 | ACTIVE | VQFN | RGY | 14 | 3000 | RoHS & Green | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | LC06A | Samples |

⁽¹⁾ The marketing status values are defined as follows: **ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.



PACKAGE OPTION ADDENDUM

10-Dec-2020

⁽²⁾ RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

⁽³⁾ MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

⁽⁴⁾ There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

⁽⁵⁾ Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF SN74LVC06A :

- Automotive: SN74LVC06A-Q1
- Enhanced Product: SN74LVC06A-EP

NOTE: Qualified Version Definitions:

- Automotive Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Enhanced Product Supports Defense, Aerospace and Medical Applications


PACKAGE MATERIALS INFORMATION

Texas Instruments


www.ti.com

TAPE AND REEL INFORMATION



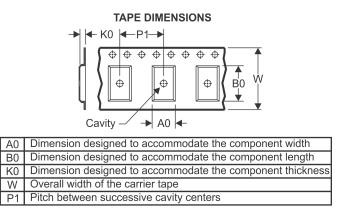

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

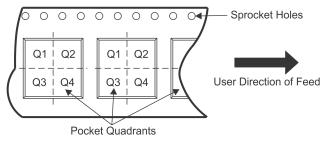


| *All dimensions are nominal | | | | | | | | | | | | |
|-----------------------------|-----------------|--------------------|----|------|--------------------------|--------------------------|------------|------------|------------|------------|-----------|------------------|
| Device | Package Type | Package Drawing | | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
| SN74LVC06ADBR | SSOP | DB | 14 | 2000 | 330.0 | 16.4 | 8.35 | 6.6 | 2.4 | 12.0 | 16.0 | Q1 |
| SN74LVC06ADGVR | TVSOP | DGV | 14 | 2000 | 330.0 | 12.4 | 6.8 | 4.0 | 1.6 | 8.0 | 12.0 | Q1 |
| SN74LVC06ADR | SOIC | D | 14 | 2500 | 330.0 | 16.4 | 6.5 | 9.0 | 2.1 | 8.0 | 16.0 | Q1 |
| SN74LVC06ADT | SOIC | D | 14 | 250 | 330.0 | 16.4 | 6.5 | 9.0 | 2.1 | 8.0 | 16.0 | Q1 |
| SN74LVC06ANSR | SO | NS | 14 | 2000 | 330.0 | 16.4 | 8.2 | 10.5 | 2.5 | 12.0 | 16.0 | Q1 |
| SN74LVC06APWR | TSSOP | PW | 14 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| SN74LVC06APWT | TSSOP | PW | 14 | 250 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| SN74LVC06ARGYR | VQFN | RGY | 14 | 3000 | 330.0 | 12.4 | 3.75 | 3.75 | 1.15 | 8.0 | 12.0 | Q1 |



www.ti.com

PACKAGE MATERIALS INFORMATION

19-Jun-2021

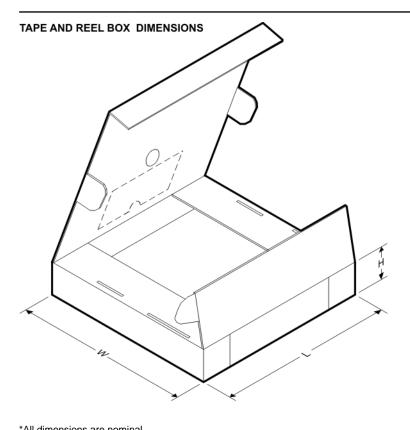

| *All dimensions are nominal | | | | | | | |
|-----------------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
| SN74LVC06ADBR | SSOP | DB | 14 | 2000 | 853.0 | 449.0 | 35.0 |
| SN74LVC06ADGVR | TVSOP | DGV | 14 | 2000 | 853.0 | 449.0 | 35.0 |
| SN74LVC06ADR | SOIC | D | 14 | 2500 | 853.0 | 449.0 | 35.0 |
| SN74LVC06ADT | SOIC | D | 14 | 250 | 210.0 | 185.0 | 35.0 |
| SN74LVC06ANSR | SO | NS | 14 | 2000 | 853.0 | 449.0 | 35.0 |
| SN74LVC06APWR | TSSOP | PW | 14 | 2000 | 853.0 | 449.0 | 35.0 |
| SN74LVC06APWT | TSSOP | PW | 14 | 250 | 853.0 | 449.0 | 35.0 |
| SN74LVC06ARGYR | VQFN | RGY | 14 | 3000 | 853.0 | 449.0 | 35.0 |

MECHANICAL DATA



- D. The package thermal pad must be soldered to the board for thermal and mechanical performance.
- E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
- earrow Pin 1 identifiers are located on both top and bottom of the package and within the zone indicated.
- The Pin 1 identifiers are either a molded, marked, or metal feature.
- G. Package complies to JEDEC MO-241 variation BA.



RGY (S-PVQFN-N14)

PLASTIC QUAD FLATPACK NO-LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.



NOTE: All linear dimensions are in millimeters





NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.

D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com http://www.ti.com.

- E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
- F. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.



MECHANICAL DATA

PLASTIC SMALL-OUTLINE PACKAGE

0,51 0,35 ⊕0,25⊛ 1,27 8 14 0,15 NOM 5,60 8,20 5,00 7,40 \bigcirc Gage Plane ₽ 0,25 7 1 1,05 0,55 0°-10° Δ 0,15 0,05 Seating Plane — 2,00 MAX 0,10PINS ** 14 16 20 24 DIM 10,50 10,50 12,90 15,30 A MAX A MIN 9,90 9,90 12,30 14,70 4040062/C 03/03

NOTES: A. All linear dimensions are in millimeters.

NS (R-PDSO-G**)

14-PINS SHOWN

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



MECHANICAL DATA

PLASTIC SMALL-OUTLINE

MPDS006C - FEBRUARY 1996 - REVISED AUGUST 2000

DGV (R-PDSO-G**)

24 PINS SHOWN



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.
- D. Falls within JEDEC: 24/48 Pins MO-153

14/16/20/56 Pins – MO-194



D (R-PDSO-G14)

PLASTIC SMALL OUTLINE



NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.





NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
 E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE



A. An integration of the information o

Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.

Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.

E. Falls within JEDEC MO-153





NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



MECHANICAL DATA

MSSO002E - JANUARY 1995 - REVISED DECEMBER 2001

DB (R-PDSO-G**)

PLASTIC SMALL-OUTLINE

28 PINS SHOWN



NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
- D. Falls within JEDEC MO-150



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (https://www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2021, Texas Instruments Incorporated